

Category 7_A 1000 MHz Cable

- International

Siemon's fully shielded Category 7_A 1000 MHz end-to-end cabling solution is the highest-performing, most secure twisted-pair copper cabling system available. Siemon's Category 7_A 1000 MHz SFTP cable perfectly complements the performance of the TERA outlet exceeding all ISO/IEC requirements for Category 7_A/Class F_A transmission performance. A fully shielded cable with individual foils around each pair coupled with a high screen coverage outer braid provides perfect immunity from outside interferences. In addition, the cable jacket has been qualified for mechanical reliability in high temperature environments up to 75°C. In PoE remote power applications, this cable can be installed in environments up to 60°C and will not experience degradation due to heat rise inside the cable bundle. Further, this 7A cable is capable of running multiple lower speed applications, known as cable sharing, from one drop. Siemon cable is the ideal way to ensure optimum channel performance and is essential for a complete end-to-end warranted solution.



Siemon's **PowerGUARD** technology with a 75°C operating temperature improves heat dissipation for reduced length derating and bundling requirements in remote powering applications, including PoE and power over HDBaseT (POH).

COMPLIANCE



- ISO/IEC 11801-1 Ed 1.0
- IEC 61156-5 Ed 2.1 (Category 7A)
- EN 50288
- EN 55022
- EN 50173
- EN 55024
- LSOH: IEC 60332-1, IEC 60332-3-22, IEC 60754, and IEC 61034
- EN50575 Class D_{ca}S₁d_{1a}₁

CABLE CONSTRUCTION

- S/FTP
- Nominal jacket OD: 7.7mm (0.30 in.)
- 0.57mm (0.022 in.) solid (non-tinned) copper
- Sequential measurement markings on jacket
- Pairs individually shielded with aluminum-polyester foil
- Overall tinned-copper braid
- 75° C temperature rating

APPLICATIONS SUPPORT

- 10GBASE-T
- 1000BASE-T
- 100BASE-T
- 10BASE-T
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)

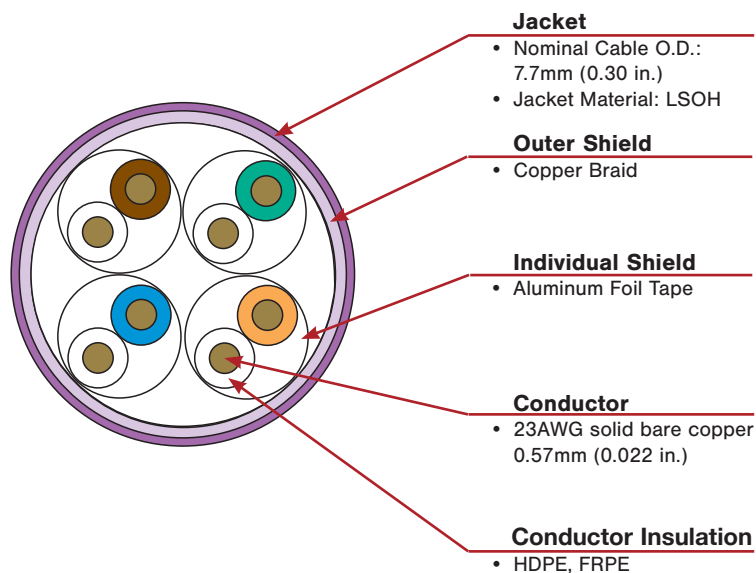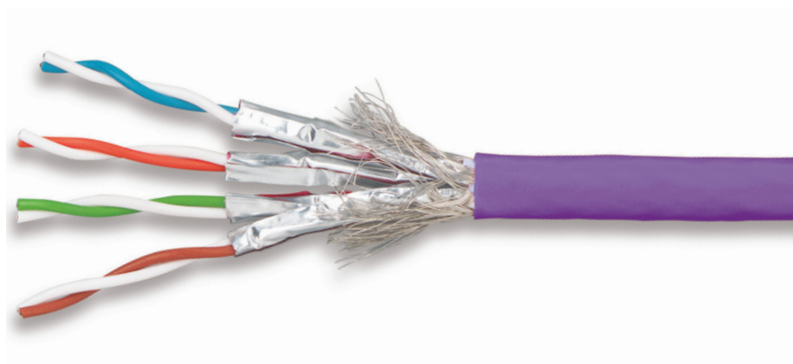

Product Information

ELECTRICAL SPECIFICATIONS

DC Resistance	<7.32 Ω/100m
DC Resistance Unbalance	≤2%
Mutual Capacitance	5.6 nF/100m
Capacitance Unbalance	≤160 pF/100m
Characteristic Impedance (ohms)	1-100 MHz: 100 ± 15% 100-250 MHz: 100 ± 22% 250-1000 MHz: 100 ± 25%
NVP	70%
TCL	40-10 log(f) dB
Delay Skew	25ns/100m

PHYSICAL PROPERTIES

LSOH	
Pulling Tension (max)	110N (25 lbf)
Bend Radius (min)	50mm (2.0 in.)
Installation Temperature	0 to 75°C (+32 to 167°F)
Storage Temperature	-20 to 75°C (-4 to 167°F)
Operating Temperature	-20 to 75°C (-4 to 167°F)

TRANSMISSION PERFORMANCE



GUARANTEED WORST CASE



SIEMON TYPICAL

Frequency (MHz)	Insertion Loss (dB/100)		NEXT (dB)		PS NEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		Propagation Delay (ns)	
1.0*	1.9	1.6	78.0	105.0	75.0	102.0	76.1	103.0	73.1	100.0	77.0	96.0	75.0	94.0	20.0	31.0	536	512
4.0	3.5	3.0	78.0	105.0	75.0	102.0	74.6	102.0	71.6	99.0	77.0	96.0	75.0	94.0	23.0	34.0	518	494
10.0	5.4	4.9	78.0	105.0	75.0	102.0	72.6	100.0	69.6	97.0	74.0	96.0	71.0	94.0	25.0	35.0	511	487
16.0	6.8	6.3	78.0	105.0	75.0	102.0	71.2	99.0	68.2	96.0	70.0	96.0	67.0	94.0	25.0	35.0	509	485
20.0	7.5	7.0	78.0	105.0	75.0	102.0	70.3	98.0	67.4	95.0	68.0	96.0	65.0	94.0	25.0	35.0	508	484
31.25	9.6	8.9	78.0	105.0	75.0	102.0	68.5	96.0	65.5	93.0	64.0	93.0	61.0	91.0	23.6	34.0	506	482
62.5	13.7	12.8	78.0	105.0	75.0	102.0	64.3	92.0	61.3	89.0	58.0	88.0	55.0	86.0	21.5	32.0	505	481
100.0	17.5	16.5	76.0	105.0	73.0	102.0	58.5	89.0	55.5	86.0	54.0	82.0	51.0	80.0	20.1	31.0	504	480
200.0	25.3	23.5	71.0	102.0	68.0	100.0	46.2	79.0	43.2	77.0	48.0	78.0	45.0	75.0	18.0	29.0	503	479
250.0	28.5	28.2	70.0	102.0	67.0	100.0	41.5	74.0	38.5	72.0	46.0	75.0	43.0	70.0	17.3	28.0	502	502
300.0	31.5	28.9	69.0	102.0	66.0	97.0	37.3	73.0	34.3	68.0	44.0	70.0	41.0	68.0	17.3	28.0	502	478
350.0	34.3	31.5	68.0	100.0	65.0	97.0	33.6	69.0	30.6	66.0	43.0	70.0	40.0	63.0	17.3	28.0	502	478
400.0	36.9	33.1	67.0	95.0	64.0	93.0	30.1	62.0	27.1	60.0	42.0	66.0	39.0	59.0	17.3	28.0	502	478
550.0	44.1	40.2	65.0	95.0	62.0	93.0	20.8	55.0	17.8	53.0	39.0	60.0	36.0	56.0	17.3	28.0	502	478
600.0	46.3	41.7	64.0	95.0	61.0	93.0	18.0	53.0	15.0	51.0	38.0	55.0	35.0	53.0	17.3	28.0	502	478
800.0	54.5	47.6	62.0	90.0	59.0	87.0	7.9	42.0	4.9	39.0	36.0	47.0	33.0	44.0	16.1	28.0	501	477
1000.0	62.0	54.5	61.0	85.0	58.0	83.0	-1.0	31.0	-4.0	29.0	34.0	40.0	31.0	38.0	15.5	27.0	501	477
1200.0*	-	59.8	-	80.0	-	77.0	-	20.0	-	17.0	-	35.0	-	33.0	-	27.0	-	477

*Values below 4 MHz are for information only.

**Values for IEC 61156-5 above 1000MHz are for information only.

All performance based on 100 meters (328 ft.).

Ordering Information

Part Number Description

9T7L4-E10	LSOH (IEC 60332-1), (IEC 60332-3-22), violet jacket, Class E _{ca} , D _{ca} , 305m (1000 ft.)
9T7L4-E10-5CR	LSOH (IEC 60332-1), (IEC 60332-3-22), violet jacket, Class E _{ca} , D _{ca} , 500m (1640 ft.)
9T7L4-E10-1KR	LSOH (IEC 60332-1), (IEC 60332-3-22), violet jacket, Class E _{ca} , D _{ca} , 1000m (3281 ft.)



Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America	Asia Pacific	Latin America	Europe	China	India Middle East
P: (1) 860 945 4200	P: (61) 2 8977 7500	P: (571) 657 1950/51/52	P: (44) 0 1932 571771	P: (86) 215385 0303	P: (971) 4 3689743

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS

WWW.SIEMON.COM

