



Features

Meets Cisca and BSEN12825 Standards.

70° directional airflow directed to where you need it, reducing air loss.

The only directional panel in the world made of cast aluminium.

Extremely Durable Grey Hammer-tone powdercoat finish to prevent corrosion.

Comes with a Split Louvered Damper so you can adjust the volume of air.

Maximum Cool Air for Maximum Efficiency

EZ-65-D is a 70 degree directional tile that will put the cold air where you want it... directly into your server cabinet. A directional tile reduces air loss and the EZ-65-Directional tile is a full 65% open area tile so you'll get maximum amount of air to cool those high density servers. The EZ-65-D is the ONLY directional airflow panel in the world made of cast aluminium so there is no worry of zinc whiskers or rust... ever!


The EZ-65-D has a factory applied, extremely durable, grey hammer-tone powder coat finish to prevent corrosion. The EZ-65-D meets the MOBP2 PS, Cisca and BS EN12825 standards for point load, uniform distributed load and rolling load.

The EZ-65-D is also available with a split louvered (opposable -plate) damper so you can adjust the volume of air needed for your particular application and equipment load. The EZ-65-D damper has a slim profile so the underfloor laminar airflow is not affected.

Specifications:

Physical	
Dimensions:	600mm x 600mm x 55mm
Weight:	8.8 kg
Material:	Cast Aluminium
Open Area:	65%
Conformance	
Standards:	MOB PF2 PS, Cisca, BS

Dimensions

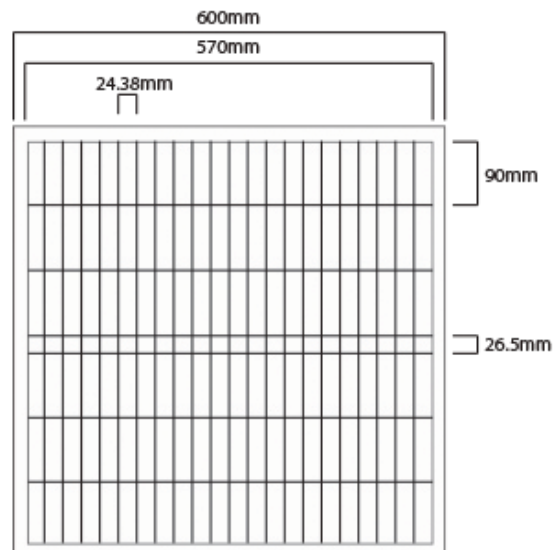

Ordering Information:

EZ-65-D

EZ-65-D Directional High Output Airflow Panel



NORIAK Distribution - Pôle Télécom & Réseau
9 rue de la Frébardière - Ecopôle Sud Est - 35510 Cesson-Sévigné