



Features

Meets Cisca and BS EN 12825 Standards.

55% open area to deliver more air.

Self-retracting lift handle make it easier to lift and install.

Durable epoxy coat that is static dissipative to provide long-wearing, corrosion resistant finish.

Specifications:

Physical

Dimensions: 600mm x 600mm x 55mm

Weight: 8.8 kg

Material: Steel Panel (Epoxy finish)


Open Area: 55%

Conformance

Standards: MOB PF2 PS, CISCA, BS

Maximum Cool Air for Maximum Efficiency

With a massive 55% open area, EZ-55 Floor Tile delivers more than twice the cold air volume to the server rack as ordinary perforated tiles. The built in self-retracting lift handle, makes it one of the easiest panels to lift and manage in the data centre. A durable epoxy coat (static-dissipative) finish is standard and provides a long-wearing, corrosion resistant finish to ensure years of out-standing service. Optimal supply air temperatures to Lo-Mid-Hi server inlets improves energy efficiency and equipment reliability.

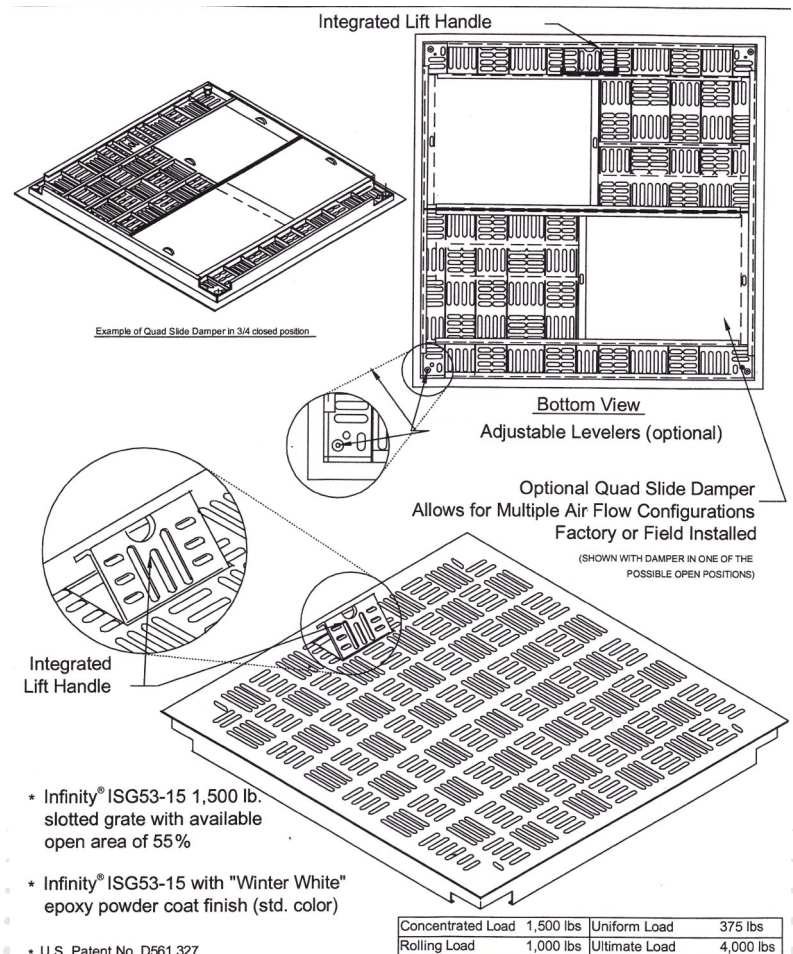

Ordering Information:

EZ-55

EZIBLANK® 55% High Output Airflow Panel



NORIAK Distribution - Pôle Télécom & Réseau
9 rue de la Frébarrière - Ecopôle Sud Est - 35510 Cesson-Sévigné